
CONTENTS OF THE BOX CHARGER - QUAD DOCK (RV4004)








Power supply with cable and DC plug

ALSO NEEDED - NOT INCLUDED IN RV4004



External power cable - ordered separately (varies depending on region)

WALL BRACKET - QUAD DOCK (RV4007)






This Guide

WALL MOUNTING


1 Attach the Bracket to the Wall

Attach the bracket to the wall, as shown below, using anchors that are suitable for the wall type. See the location guide on the next panel for the positioning of the anchors.



2 Attach the Charger to the Bracket


Lower the keyhole slots on the base of the charger over the tabs on the bracket. Then push the charger towards the back of the bracket until it clicks into place.



LOCATION GUIDE FOR THE MOUNTING SCREWS


WALL MOUNTING

Rear view of bracket




TABLETOP MOUNTING

Underside of charger




Cross-section of mounting tab



TABLETOP INSTALLATION CHARGER NOT ANCHORED TO THE TABLE

Set the charger down on its rubber feet as shown:




CHARGER ANCHORED TO THE TABLE

1 Attach 4 Anchoring Screws to the Tabletop

See location guide, on the previous panel, for the positions of the screws and the size of the screwheads.

2 Attach Charger to Anchoring Screws

Lower the keyhole slots on the base of the charger over the screwheads. Then push the charger backwards until it clicks into place.






CONNECT THE CHARGER TO EXTERNAL POWER


1 Connect the Power Supply to the Charger

Insert the DC plug from the power supply into the socket on the back of the charger:



- Connect the Power Supply to an External Power Source
- 3 For a Wall-Mounted Charger...


Place the power supply in the holder and route the cables as shown here:

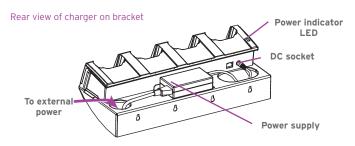

CHARGE

Insert an EP10 into the Charger

Slide an EP10, as shown, into each charge compartment until a click is heard.



2 Charge EP10 for 3 hours to 4 hours

Note: Full battery performance is only reached after the first few charge/discharge cycles.

3 hours to 4 hours





0 °C to 40 °C 32 °F to 104 °F

BATTERY CHARGE INDICATOR

The charge LED is the left LED on EP10.



	Charge LED Behaviour	Description
	Off	No battery detected.
	Solid Green	Battery charging complete.
	Flashing Green	Charge in progress.
	Flashing Yellow	Battery is not charging due to out-of-temperature conditions.
	Solid Red	Unable to read battery or non Psion battery.

© Copyright 2011 by Psion Inc.

Psion, Psion Teklogix, and EP10 are trademarks of Psion Inc. Other product names mentioned in this document are trademarks or registered trademarks of other hardware, software, or service providers and are used herein for identification purposes only.



EP10[™]

RV4004 CHARGER QUAD DOCK









April 21, 2011 PN 8000232.A

ISO 9001 Certified Quality Management System